


H-FLEX PWR AFR PUR+LUM

0.6/1 kV

Reinforced retroreflective umbilical power cable

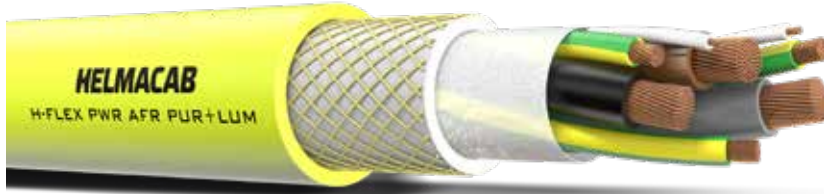

• RETROREFLECTIVE • FLAME-RETARDANT • REINFORCED • OIL & CHEMICAL RESISTANT • HALOGEN-FREE • MUD RESISTANT

CONDUCTOR	Stranded annealed copper conductor, IEC 60228 class5
INSULATION	XLPE
STRANDING	Cores stranded together
LONGITUDINAL REINFORCEMENT	Braided aramid yarns in outer sheath
SHEATH	Halogen-free Thermoplastic Polyurethane acc. to EN 50363-10-2/TMPU Standard colour luminescent yellow
REFERENCE STANDARD	Helmacab specification, adapted to and tested according to IEC 60502-1 series and IEC 60092-353

APPLICATION

Aramid braiding reinforced, flame-retardant and highly flexible umbilical power cable for extreme conditions. Retroreflective and phosphorescent outer sheath provides improved visibility in dark lighting conditions, with longevity and without diminishing properties.

Intended for flexible, portable and movable applications in machineries, machine tools, robot technics, and can be submersed into water. Good mechanical characteristics, high tensile strength, resistant to UV, abrasion, chemicals, oil and other fluids. Good winding and unwinding strength. Suitable for drag chain use.

PHYSICAL PROPERTIES

MIN. BENDING RADIUS	Fixed: $4 \times \varnothing < 25 \text{ mm} < 6 \times \varnothing$ Mobile: $8 \times \varnothing < 25 \text{ mm} < 10 \times \varnothing$ S-shape deflection: $15 \times \varnothing < 25 \text{ mm} < 20 \times \varnothing$
MAX. TENSILE LOAD WITHOUT STRENGTH MEMBERS	15 N/mm ² of phases copper cross section
CORE IDENTIFICATION	Brown, Black, Grey, Y/G (PE), pilot wires

MAIN CHARACTERISTICS

FIRE PERFORMANCE	IEC 60332-1-2
RATED VOLTAGE	AC 0.6/1 kV (1.2 kV) DC 0.9/1.5 kV (if voltage to earth does not exceed 0.9 kV)
HALOGEN-FREE	IEC 60754 series
MECHANICAL FLEX TEST	EN 50396 - conditions acc. to EN 50525
OIL RESISTANCE	EN 60811-404 - conditions acc. to EN 50363-10-2
OPERATING TEMPERATURE	-60 - 80 °C fixed use -35 - 80 °C flexible use
MAX. CONDUCTOR TEMPERATURE	90 °C

Subject to change without prior notice. See latest update on our webpage.

© 2025 Helmacab Oy. All rights reserved.

HELMACAB
A WORLD OF CONNECTIONS

customer.care@helmacab.com
+358 2 410 8700

HELMACAB
HOLLAND

sales.holland@helmacab.com
+ 31 183 617 109

HELMACAB
SHANGHAI

sales.shanghai@helmacab.com
+86 21 3365 5333


helmacab.com

H-FLEX PWR AFR PUR+LUM 0.6/1 kV

Main conductors	PE conductors	Pilot conductors	Nominal outer Ø (mm)	Weight kg/km	Part number
3 x 25 mm ²	3 x 6 mm ²	2 x 1.0 mm ²	25.8	1150	5336013035
3 x 35 mm ²	3 x 6 mm ²	2 x 1.5 mm ²	27.1	1440	5336014035
3 x 50 mm ²	3 x 10 mm ²	2 x 1.5 mm ²	31.1	2030	5336015035
3 x 70 mm ²	3 x 16 mm ²	2 x 1.5 mm ²	35.6	2830	5336016035
3 x 95 mm ²	3 x 16 mm ²	2 x 1.5 mm ²	38.3	3500	5336017035
3 x 120 mm ²	3 x 25 mm ²	2 x 1.5 mm ²	43.8	4550	5336018035
3 x 150 mm ²	3 x 25 mm ²	2 x 1.5 mm ²	48.6	5510	5336019035
3 x 185 mm ²	3 x 35 mm ²	2 x 1.5 mm ²	51.9	6720	5336020035
3 x 240 mm ²	3 x 50 mm ²	2 x 1.5 mm ²	58.6	8960	5336021035

Screened, copper wire braided cable types and hybrid cable solutions also available.

LUMINOUS INTENSITY

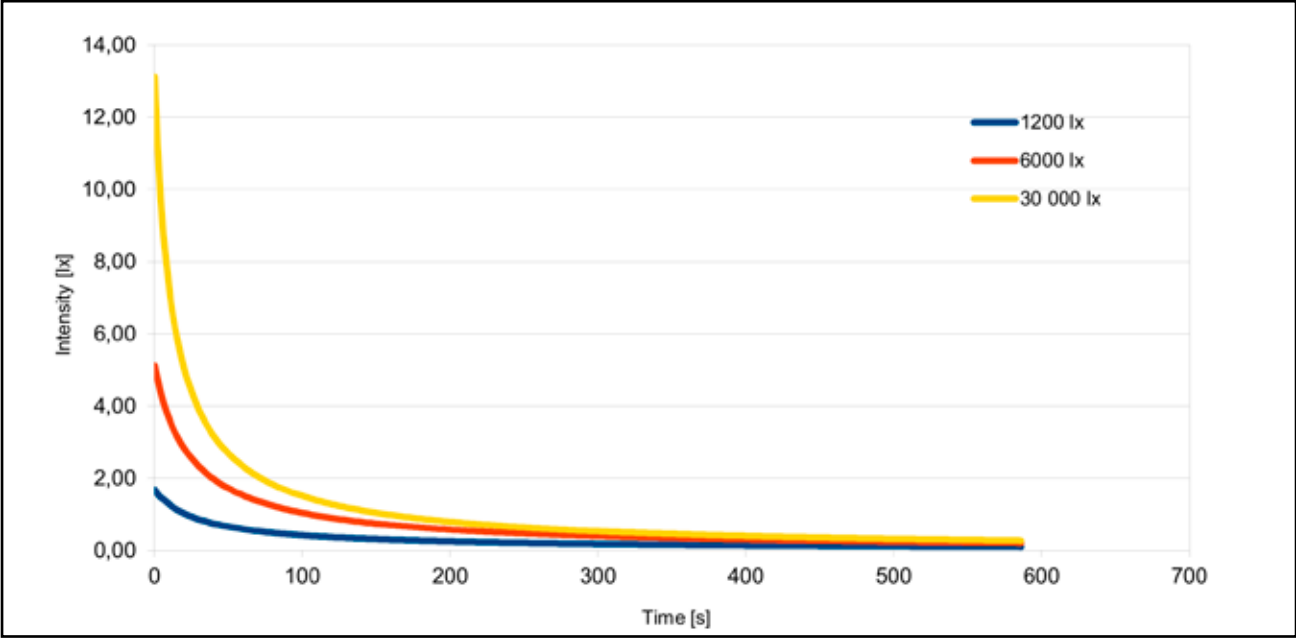

Luminous intensity test for luminosity after loading under light



↑ BRILLIANT OUTER SHEATH
 HELMACAB™ H-FLEX PWR AFR PUR+LUM provides improved visibility in dark lighting conditions, with longevity and without diminishing properties.